


Flat Panel Monitor

MODEL 191PMulti-scan

19" Industrial LCD PANEL MOUNT Display – Multi-scan

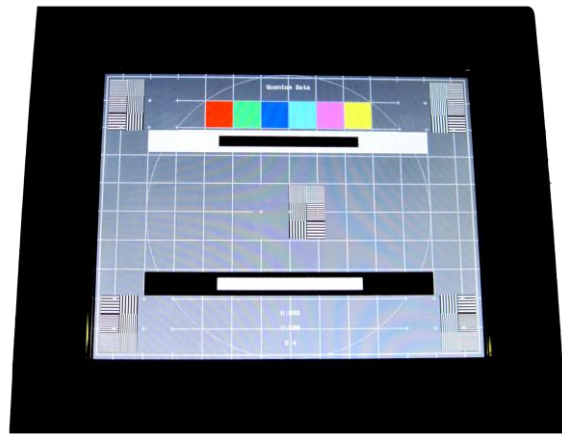

Features

- High Brightness & Long Life TFT Panel
- Resolution (1280 x 1024 pixels)
- Metal Cased Construction
- Easy monitor exchange mounting mechanics
- 12Vdc or 115/230Vac Power Inputs (Power Supply Included)
- OPTION :Touch screen Resistive or Capacitive
- OPTION : 24 VDC power input

Specifications

- | | | | |
|-----------------------------|-----------------------------|-----------------------------|----------------------------------|
| • Type: | A-Si Color TFT | • Horizontal Scan | Multi-scan 15-80KHz |
| • Colors: | 16.2 M | • Vertical Scan: | Multi-scan 45-90Hz |
| • Resolution: | 1280 x 1024 pixels (native) | • AC Model: | 115/230V 50/60Hz |
| • Active Area: | 338 x 270 mm | • Power Consumption: | 54 W (max) |
| • Backlight Life: | 50,000 hours typical | • Dimensions: | 360 x 298 x 21 mm (approx) |
| • Brightness: | 300 cd/m2 typical (nits) | • Weight: | 4.5 Kg (approx) |
| • Contrast Ratio: | 700:1 | • Housing: | Zinc-plated steel |
| • Viewing Angles: | 75/75/75/60 | • Operating Temp: | 0 to 50 °C (32 to 122 °F) |
| • Response Time: | 8 msec (tr + tf) | • Storage Temp: | -20 to 60 °C (-4 to 140 °F) |
| • Video Connections: | Analog RGB & TTL (optional) | • Approvals: | UL certified PS and Construction |
| • Input Connectors: | 15-pin HD, 9 Pin (optional) | | |
| • Sync. Type/Level: | Separate H&V (+/-ve) TTL | | |